





Mark G+ Module

- (GB) Indoor version
- (DE) Innen Ausführung
- (FR) Version interieur
- (NL) Binnenopstelling

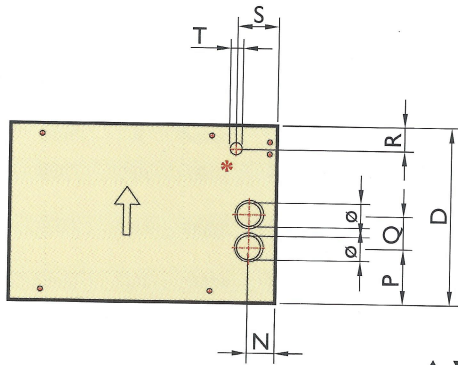

Mark G+

Condensing unit
Kondensierende Ausführung
Modèle condensation
Condenserende uitvoering


Condensation drain $\varnothing$ 40mm
Kondensat Anschluss $\varnothing$ 40mm
Connection pour condensation $\varnothing$ 40mm
Condensaataansluiting $\varnothing$ 40mm

*) Gas connection / Gasanschluss / Raccordement gaz / Gasaansluiting

T: Type/Typ
Modèle

Dimensions mm
Abmessungen mm
Dimensions mm
Maatvoering mm

T	B	C	D	E	F	G	H	I	$\varnothing$	P	Q	R	S	T	UI	U2	V	WI	W2	X	Y
35	875	810	739	35	105	600	165	110	80	240	120	97	175	3/4"	810	-	57	875	760	608	101
40	875	810	739	35	105	600	165	110	80	240	120	97	175	3/4"	810	-	57	875	760	608	101
60	1120	810	739	35	105	600	165	110	100	230	140	97	175	3/4"	810	-	57	1120	1005	608	101
80	1305	810	739	35	105	600	165	110	100	230	140	97	175	1"	810	1110	57	1305	1190	608	101
100	1595	810	739	35	105	600	165	110	100	230	140	97	175	1"	810	1110	57	1595	1480	608	101
150	1890	1000	1000	35	105	790	190	175	130	250	225	140	170	1"	-	1110	135	1890	1620	800	100

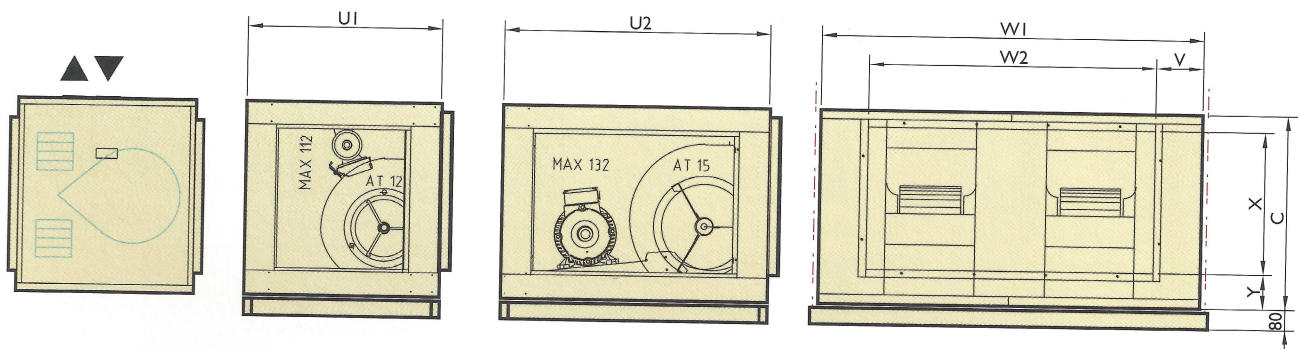

Type G+

m^3/h
minimum

m^3/h
nominal

m^3/h
maximum



typ



max.

m^3/h
max.



typ



max.

Type G+	m^3/h minimum	m^3/h nominal	m^3/h maximum	typ	max.	m^3/h max.	typ	max.
35	3760	5000	7200	12-12	112			
40	3760	5000	7200	12-12	112			
60	5640	6500	8640	12-12	112			
80	7520	10000	-	twin 12-19	112	13680	twin 15-11	132
100	9400	12500	-	twin 12-12	112	16200	twin 15-11	132
150	14000	18500	-	-	-	20880	twin 15-15	132

Ventilator/
ventilateur:
0 - 500 Pa